

DIGITAL PROJECTOR | MW571



Features


- Native WXGA (1280x800) resolution
- 3,200 ANSI lumens
- 13,000:1 high contrast ratio
- Full HD 3D support
- HDMI
- Network standby <0.5W



Specifications

Projection System	DLP®
Native Resolution	WXGA(1280 x 800)
Brightness	3,200AL
Contrast Ratio	13,000:1
Display Color	1.07 Billion Colors
Lens	F=2.59~2.87, f=16.88~21.88mm)
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	1.21~1.57
Image Size	60"-180"
Zoom Ratio	1.3x
Lamp Type	196W
Lamp (Normal/Eco/SmartEco/ LampSave)*	4000/6000/6500/10000 hours
Keystone Adjustment	1D, Vertical +/- 40 degrees
Projection Offset	Vertical: 120% ±5%
Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
Horizontal Frequency	15~102KHz
Vertical Scan Rate	23~120Hz
Compatibility	HDTV Compatibility: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p Video Compatibility: NTSC, PAL, SECAM 3D Compatibility: Frame Sequential: Up to 60Hz 720p Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 24Hz 1080p Top Bottom: Up to 60Hz 1080p
Interface	Computer in (D-sub 15pin) x 2(shared with component video) HDMI x 1 Monitor out x 1 Composite Video in (RCA) x 1 S-Video in x 1 Audio in (Mini Jack) x 1 Audio out (Mini Jack) x 1 Speaker 10W x 1 LAN(RJ-45) x 1 USB (Type mini B) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1 (Front)
Dimensions (WxHxD)	11.14" x 3.7" x 8.7" / 283 x 95 x 222 mm (with feet) 11.14" x 3.5" x 8.7" / 283 x 88.7 x 222 mm (without feet)
Weight	4.19 lbs (1.9 Kg)
Power Supply	AC100 to 240 V, 50 to 60 Hz
Power Consumption	Normal 265W, Eco 220W, Network standby <6W, Standby <0.5W
Power Management Function	Automatic power off after 20 minutes without a display source
Audible Noise	33/28 dBA (Normal/Economic mode)
Languages	(28 Languages)
Picture Mode	Dynamic / Presentation / sRGB / Cinema / (3D) / User 1 / User 2
Accessories (Standard)	Remote Control w/ Battery, Power Cord, User Manual CD, Quick Start Guide, Warranty Card, VGA Cable
Accessories (Optional)	Spare Lamp Kit P/N: 5J.JC205.001 Ceiling Mount Kit P/N: 5J.JAM10.001 3D Glasses P/N: 5J.J9H25.001 Carry Bag BGQS01 P/N: 5J.J3T09.001
UPC / Part #	8400460-3357-6 / 9H.JEM77.13A
Limited Warranty	3 Years Parts/Labor; 1 Year or 2,000 hours of lamp life

Input and Output Terminals

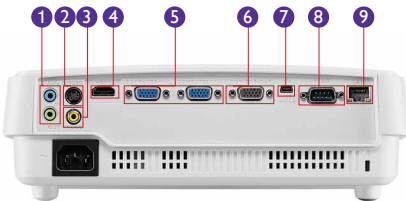

- 1 Audio in/out (Mini Jack)
- 2 S-Video in (Mini DIN 4pin)
- 3 Composite Video in (RCA)
- 4 HDMI
- 5 Computer in 1/2 (D-sub 15pin)
- 6 Monitor out (D-sub 15pin)
- 7 USB (Type Mini B)
- 8 RS232 (DB-9pin)
- 9 LAN (RJ45)

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.




BenQ America Corp.
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands, and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.
MW571 081315_BQus



MW571 Digital Projector



Distance Chart

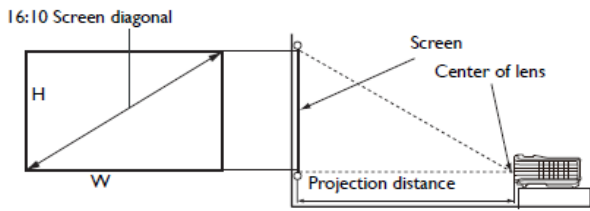

Screen Size				Distance from screen (inch)			Vertical offset (inch)
Diagonal		W (inch)	H (inch)	Min length	Average	Min length	
Inch	mm			Max zoom		Max zoom	
60	1524	51	32	61.5	70.7	79.8	3.2
70	1778	59	37	71.8	82.5	93.1	3.7
80	2032	67	42	82.0	94.2	106.4	4.2
90	2286	76	47	92.3	106.1	119.8	4.7
100	2540	84	53	102.5	117.8	133.1	5.3
110	2794	93	58	112.8	129.6	146.4	5.8
120	3048	102	63	123.1	141.4	159.7	6.3
130	3302	110	68	133.3	153.2	173.1	6.8
140	3556	118	74	143.6	165.0	186.3	7.4
150	3810	127	79	153.8	176.8	199.7	7.9
160	4064	136	84	164.1	188.5	213.0	8.4
170	4318	144	90	174.4	200.3	226.3	9.0
180	4572	152	95	184.6	212.1	239.6	9.5

Ceiling Mount Chart


Ceiling Mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

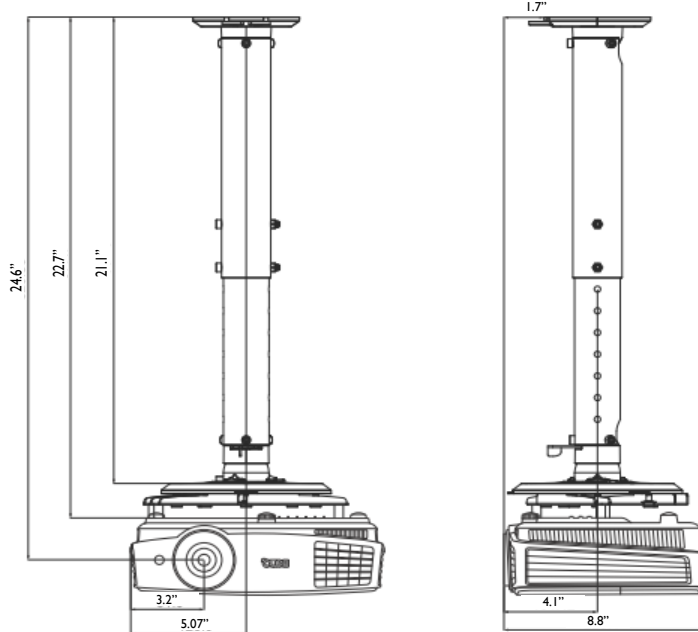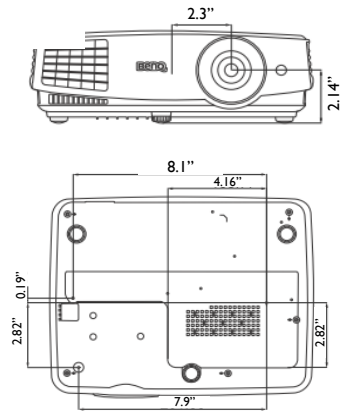

Units: inch

Ceiling Mount Chart

Units: inch

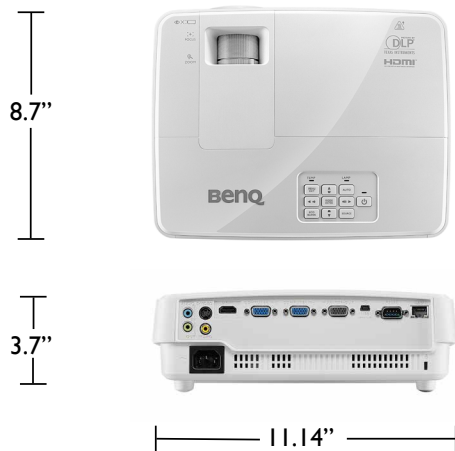

Because it matters