

# Multimedia Projector

## LV-WX300

you can



## Bright and clear WXGA portable projector with digital input and easy operation.

Enjoy bright, high quality widescreen images and exceptionally easy set-up with the Canon LV-WX300. HDMI input, quiet operation and compact size add to the projector's flexibility.

### Key features

- Enjoy sharp, widescreen images with native WXGA resolution (1280 x 800 pixels)
- Experience bright, vivid images with 3000 lumens brightness and 2300:1 contrast ratio
- 1.1x zoom lens allows flexible projector placement
- Compact and lightweight: just 2.5kg
- Vertical keystone correction
- 5000h lamp life (6000h in Eco Mode)
- HDMI™ port and 2x VGA ports
- RJ-45 network port for remote control and monitoring
- Built-in 10W speaker

### What's in the box

Multimedia Projector LV-WX300, Remote Controller, Battery, AC Mains Power Cable, Computer Connection Cable, Instruction Manual on CD-ROM, Important Information and Quick Start Document, European Warranty Document

### Dimensions (W x H x D)

282 mm x 115 mm x 232 mm

### Weight

2.5 kg



PROJECTOR

# Canon

# LV-WX300


## Specifications



<b>MULTIMEDIA PROJECTOR</b> Product Class	Ultra-Portable
<b>LCD PANEL</b> Type Size and Number Aspect Ratio Native Resolution	Reflective DLP™ chip 0.65" diagonal, Single chip 16:10 1280 x 800 (WXGA), 1024000 pixels
<b>OPTICS</b> Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift	190W P-VIP F2.56 - F2.8; f = 21.0 - 23.1mm 1.1x Manual Manual 50% (fixed)
<b>IMAGE AND AUDIO</b> Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Projection Ratio Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker	3000 lumens (2100 Lumens Eco mode) 75% 2300:1 (with lamp control) 1.94m - 4.85m (3.23m to 3.55m for 100" image) 60" - 150" (129 x 81 cm - 323 x 202 cm) 1.50:1 - 1.65:1 2x maximum Vertical: Manual +/-30° (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA / MAC 1080p / 1080i / 720p / 576p / 480p 1080p / 1080i / 720p / 576p / 576i / 480p / 480i PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM Presentation, Standard, sRGB, Movie, User 1 & 2 10W RMS, Monaural

<b>PORT AND CONNECTORS</b> Digital RGB / Digital Video Input Analogue RGB Input 1 Analogue RGB Input 2 S-Video Input Composite Video Input Audio Input Audio Output Projector Control Network Port Service Port	HDMI™ V1.3 Mini D-Sub 15-pin (Component Video via optional cable) Mini D-Sub 15-pin (Component Video via optional cable) Mini DIN 4-pin RCA x1 3.5mm stereo mini-jack 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232C) RJ-45 (100BASE-TX / 10BASE-T) USB Type B
<b>MECHANISMS</b> Front Elevation Mechanism Rear Adjustment Mechanism	1x Mechanical foot, 6° maximum image elevation 1x Mechanical foot
<b>RATINGS</b> Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Warranty	282 mm x 115 mm x 232 mm (including protrusions) 2.5 kg 100V - 240V AC, 50/60Hz Normal Mode: 330W / Eco Mode: 275W / Standby: 3W, Standby (LAN off): 0.5W Normal Mode: 35dBA / Eco Mode: 29dBA 0°C to +40°C 3 years
All data is based on Canon standard testing methods except where indicated. Subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.	

## Connectivity

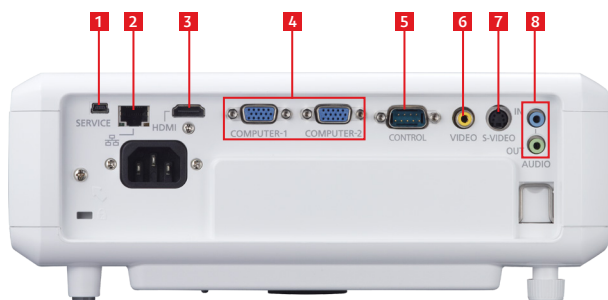

- 1** USB type B: Service port
- 2** RJ-45: Network Connection (100BASE-TX / 10BASE-T)
- 3** HDMI: HDMI Input
- 4** Mini Dsub 15 x 2: Analog PC input / Component video input
- 5** Dsub9: RS232C connection
- 6** RCA: Video input
- 7** Mini DIN4: S-video input
- 8** Mini jack x 2: Audio input x 1, Audio output x 1



Canon Inc  
canon.com

Canon Europe  
canon-europe.com

English Edition  
© Canon Europa N.V., 2014

Canon Europe Ltd  
3 The Square, Stockley Park  
Uxbridge, Middlesex  
UB11 1ET UK

# Multimedia Projector

## LV-WX300

you can



Bright and clear WXGA portable projector with digital input and easy operation.

#### The whole range consists of:

**XEED:** WUX5000, WUX5000 Medical, WUX4000, WUX4000 Medical, WX6000, WX6000 Medical, SX6000, SX6000 Medical, WUX450, WUX450 Medical, WUX400ST, WUX400ST Medical, WX520, WX520 Medical, WX450ST, WX450ST Medical.

**LV:** LV-S300, LV-WX300, LV-WX300ST, LV-X300, LV-X300ST, LV-8235UST, LV-7490.

#### Box Dimensions (W x H x D)

185 mm x 345 mm x 377 mm

#### Box Weight (Gross / Net)

Approx. 3.6 kg

#### Packet style

Pallet

#### Quantity of item

Logistical = 1  
Financial = 1


#### MERCURY CODES

##### PRODUCT

Name	Mercury Code	EAN Code
Multimedia Projector LV-WX300 (E)	9877B003AA	4549292021301
Multimedia Projector LV-WX300 (GB)	9877B005AA	8714574624938

##### OPTIONS

Remote Controller LV-RC08	0029C001AA	4549292024203
Soft Carrying Case LV-SC01	5331B001AA	4960999787930
Projector Lamp LV-LP39	0119C001AA	4549292026641

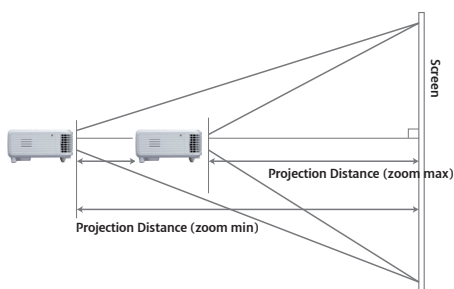

#### THROW DISTANCES (16:10 aspect ratio)

Image size (16:10)	Diagonal [type]	60	70	80	90	100	110	120	130	140	150
	Width [m]	1.3	1.5	1.7	1.9	2.2	2.4	2.6	2.8	3.0	3.2
	Height [m]	0.8	0.9	1.1	1.2	1.3	1.5	1.6	1.8	1.9	2.0
Projection distance	L (W) [m]	1.9	2.3	2.6	2.9	3.2	3.5	3.9	4.2	4.5	4.8
	L (T) [m]	2.1	2.5	2.8	3.2	3.5	3.9	4.3	—	—	—

[www.canon.com/lcd-sim](http://www.canon.com/lcd-sim)



PROJECTOR

# Canon